

1.000 - 3.000 l/h

Typical applications


- Ideal for clean or slightly contaminated acids and alkalines
- Suitable for most plating solutions
- Not suitable for electroless nickel and abrasive solutions or solutions which contain ferrous particles

Features



- Magnetic drive
- Sealless, therefore leakfree
- Provide extra safety factor for aggressive and expensive liquids
- Standard with GF union connections with a choice of sockets, available in PP, PVDF and CPVC
- Max. temp. PP 80°C / 176°F, PVDF 100°C / 212°F
- Motor with two component Polyurethane coating for excellent chemical resistance

Options


- Hose adapters



M10

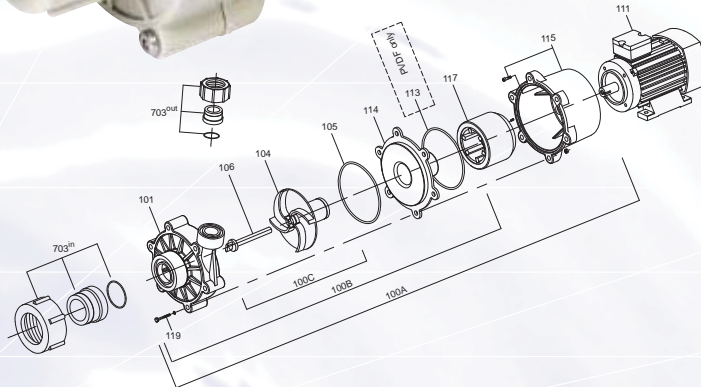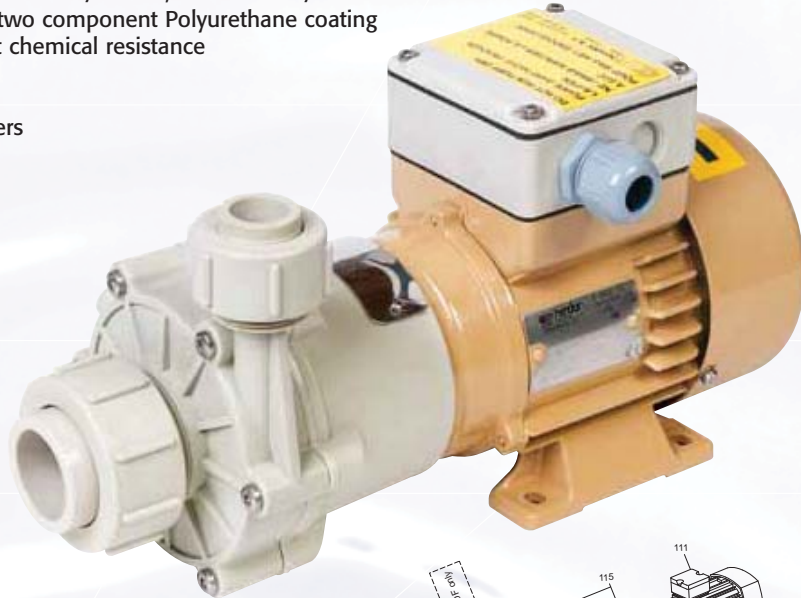

Magnetic drive pumps M10/11/15 - PP/PVDF

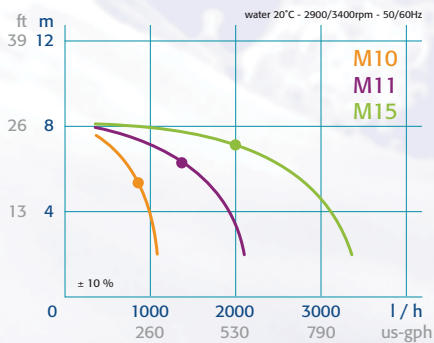

Type	Motor kW HP	Max SG at BEP	Net weight kg	In d/DN	Out d/DN
M10		1,25			
M11	0,18* 1/4*	1,22	5	32/25	20/15
M15		1,19			

* For 3-phase motors < 220V the indicated motor will be 0,25kW = 1/3HP
d/DN = OD/ID metric size pipe

 Best Efficiency Point (BEP)

 www.hendor.com

